

Fire-stopping Standard Details Guide

FirePro® EN-tested range

Version 1.0 October 2025



Welcome to the Fire-stopping Standard Details Guide

At ROCKWOOL, we know that when it comes to fire safety, there's no room for compromise.

That's why the FirePro® range delivers tested fire resilience and fire-stopping in certified applications – helping to protect buildings and the people in them when it matters most.

To support you from specification through to installation, we've refreshed our Fire-stopping Standard Details Guide – making it faster, more interactive, and easier to use across all your projects.

The updated guide gives you access to:

- New standard details, featuring the latest products and applications
- Streamlined, user-friendly layout for quicker access to key information
- Interactive navigation with intuitive buttons and links
- Rich text and a searchable index to help you find what you need faster

Whether you're specifying, designing, or installing, this guide helps you to apply ROCKWOOL solutions correctly.

Need support?

If you have any questions or need tailored technical guidance, contact our Technical Solutions team:

01656 868 490

technical.solutions@rockwool.com

Explore the full range at
rockwool.com/uk



Contents

Introduction

- 04** How to use the guide 
- 05** How to use a Standard Detail 
- 06** Fire-stopping guidance 
- 07** Standard details – ROCKWOOL comparison tool 

Single skin flexible wall

- 11** Single skin flexible wall: Penetrations aperture 
- 12** Single skin flexible wall: Cored penetration 
- 13** Single skin flexible wall: Blank seal / Head of wall 

Double skin flexible wall

- 14** Double skin flexible wall: Penetrations aperture 
- 15** Double skin flexible wall: Cored penetration 
- 16** Double skin flexible wall: Blank seal / Head of wall 

Rigid wall

- 17** Rigid wall: Cored penetration 

Rigid floor

- 18** Rigid floor: Penetrations aperture 
- 19** Rigid floor: Cored penetration 
- 20** Rigid floor: Blank seal 

Rigid wall

- 21** Linear joints 

Appendix

- 22** Index 
- 29** Legal notices 

How to use the guide

How to navigate the guide:

To find the details you're looking for, use the [contents page](#) as your main hub to locate the relevant application group.

Then, use the table on each page to find the detail you need using its service type and main service treatment.

All details now are individually hosted via the ROCKWOOL website and are freely available to download, using the links in this guide.

For an extensive overview of all details, visit the [Index](#). The Index lists every detail currently available.

Wherever you are in the guide, you can return to the contents page by clicking the 'Back to contents page' button at the top of each page.



Where to go for more detailed information:

Every standard detail contains relevant information about the chosen application including spacing, dimensions, and materials.

For additional information on ROCKWOOL products, visit www.rockwool.com/uk to download product datasheets, installation guides, and more.

Understanding drawing references:

Company / Brand identifier	Substrate	Aperture type	Seal type	Services	Unique identifier
RWFP	RF	BS	DB	CAB	0001
ROCKWOOL FirePro	Rigid floor	Blank seal	Double Batt	Cables	

Abbreviation	Full description
BS	Blank seal
BUS	Busbar
CAB	Cables
COM	Compound
CP	Copper pipes
CPP	Combustible pipe penetration
DB	Double batt
DSFW	Double skin flexible wall
LJ	Linear joint
MLC	Multi-layer composite pipe penetration

Abbreviation	Full description
NCP	Non-combustible pipe
P	Pipes
PA	Penetrations aperture
RF	Rigid floor
RW	Rigid wall
RWFP	ROCKWOOL FirePro
SB	Single batt
SSFW	Single skin flexible wall
STC	Steel channel
TR	Trunking
TRC	TracPipe

To make sure our standard details give you the information you need as clearly as possible, you'll see that we've improved both their layout and interactive features to coincide with the launch of next generation FirePro®.

[illegible]

- Page 5 of 30

Fire-stopping guidance

1. ROCKWOOL will not support the mixing of different fire protection manufacturers' systems/products of any type in line with ASFP recommendations (ASFP Advisory Note 6), unless proven by fire testing at an accredited fire test laboratory.
2. ROCKWOOL products should be installed in accordance with the relevant product datasheet and within the field of application identified within the standard details and associated classification documents.
3. Some on-site applications may be outside the scope of the standard detail pack. Please contact ROCKWOOL in these instances as we may be able to offer a manufacturers' technical evaluation. Technical evaluations are an appraisal of the likely performance of the installed ROCKWOOL products in that application when subjected to a fire resistance test. They are offered in lieu of direct formal testing and are based upon ROCKWOOL's experiences of product performance during fire resistance testing. For this reason, before installation, technical evaluations used on-site should be reviewed and accepted by Building Control and/or the scheme Fire Officer or the overseeing body for the project. ROCKWOOL has adopted the processes outlined in the PFPF guide to manage the conflict of interest inherent with a manufacturer's technical evaluation compared to an assessment developed by UKAS accredited third party, allowing for a clear a rigorous examination of the proposal by the approving body.
4. Please note that recommendations for penetration seals in drywall constructions may vary between one drylining system manufacturer to another. For the interchangeability of tested wall types please refer to ASFP Advisory Note 15. Face-fix options, with ROCKWOOL Ablative Coated Batt, are available, but please check for its suitability against the site conditions. Shaft walls are not covered by standard flexible wall constructions and should be treated independently.
5. For solutions in sandwich panel or composite wall constructions please contact the ROCKWOOL technical team.
6. Design of the opening for penetrations, and its fire-stopping, should correspond to the integrity and insulation requirements of the host wall or floor, unless leniency on the insulation rating is provided by the fire officer or overseeing body via a derogation.
7. Under the CPR it is a requirement that fire dampers are UKCA / CE marked and as such that they are installed (and fire-stopped) in line with the relevant damper manufacturer's installation guides. Damper manufacturers can now provide a tested fire-stopping solution for sealing around their damper systems. Therefore, ROCKWOOL's default position is to guide the Client and/or Installer to contact the relevant damper manufacturer for its tested and certified fire-stopping solution.
8. Services of different types can pass through the same penetration seal. ROCKWOOL recommends that ducts and dampers should pass exclusively through their own opening.
9. Service support positions should be installed as a reflection of the fire test as per industry and ASFP guidance (ASFP Advisory Note 8). Please refer to the relevant classification for further details.
10. The distance between aperture edges of penetration seals in a building element shall be as tested or 100mm. The distance between the aperture edge of a penetration seal and any other penetration (e.g. a door) shall be a minimum of 200mm. Please note that recommendations for penetration seals in drywall constructions may vary between one drylining system manufacturer to another. With reference to penetration spacings, please refer to the performance tables within the relevant ROCKWOOL standard detail. If no dimension is given, for service or aperture separation, then the separation is 100mm in line with BS EN 1366-3:2021.
11. In line with BS EN 1366-3:2021 steel cable carriers, ladders and/or trays can be any width. Please refer to the relevant standard detail for the limiting performance of cable trays, ladders and cables.
12. Where specific mechanical fixings are referenced in the details equivalent products may be used under the expert guidance of the relevant fixing manufacturer. The fixing should match in terms of overall length/ embedment and be suitable for the substrate.
13. Fire-stopping products are tested to the specific penetration type itself and do not allow for joints or valves to fall in line with the fire-stopping solution (ASFP Advisory Note 28).
14. Early engagement is encouraged to ensure tested details and spatial coordination are considered in line with ASFP Advisory Note 33 (Guidance for those involved in designing Passive Fire Protection).
15. Maximum and Minimum apertures will change depending on penetration types and time rating requirements (e.g. face fix, framed and lined or cored). Seal sizes are limited by the maximum width and height stated in the standard details and classification. In vertical supporting constructions, portrait seals are also valid in a landscape orientation. For penetration seals smaller than 300mm x 300mm, square openings cover circular openings of equal total area.
16. Trunking coverage is valid for all sizes of trunking up to the maximum cross-sectional area tested.

Standard details – ROCKWOOL comparison tool

Quickly find equivalent standard details, where applicable, to the ones you use most from our existing range.

Please use this table on pages 7-10 to find the most relevant new standard details using the reference number of our existing drawings.

If an equivalent standard detail isn't listed, please contact our Technical Solutions team for bespoke support by emailing or calling:

E: technical.solutions@rockwool.com

T: 01656 868 490.

Existing standard detail	New standard detail
RWSD-ACB-0001	RWFP-DSFW-PA-SB-0146 RWFP-DSFW-PA-SB-CAB-0150 RWFP-DSFW-PA-SB-CAB-0151 RWFP-DSFW-PA-SB-NCP-0152
RWSD-ACB-0002	RWFP-SSFW-BS-SB-0100 RWFP-SSFW-PA-SB-CAB-0106 RWFP-SSFW-PA-SB-CAB-0109 RWFP-SSFW-PA-SB-CAB-0110 RWFP-SSFW-PA-SB-NCP-0111
RWSD-ACB-0101	RWFP-DSFW-BS-DB-0160 RWFP-DSFW-BS-DB-0162 RWFP-DSFW-PA-DB-CAB-0165 RWFP-DSFW-PA-DB-CAB-0166 RWFP-DSFW-PA-DB-NCP-0167 RWFP-DSFW-PA-DB-NCP-0168
RWSD-ACB-0102	RWFP-DSFW-BS-P-0181 RWFP-DSFW-BS-DB-0195 RWFP-DSFW-PA-DB-CAB-0196 RWFP-DSFW-PA-DB-CPP-0197

Standard details – ROCKWOOL comparison tool

Existing standard detail	New standard detail
RWSD-ACB-0103	RWFP-SSFW-BS-DB-0101
RWSD-ACB-0120	N/A
RWSD-ACB-0201	RWFP-DSFW-BS-P-0180 RWFP-DSFW-PA-P-CAB-0185 RWFP-DSFW-PA-P-CAB-0186 RWFP-DSFW-PA-P-NCP-0188
RWSD-ACB-0301	RWFP-SSFW-BS-DB-0101 RWFP-SSFW-BS-P-0104 RWFP-SSFW-BS-DB-0119 RWFP-DSFW-BS-DB-0161
RWSD-ACB-0501	N/A
RWSD-ACB-1001	N/A
RWSD-ACB-1101	N/A
RWSD-ACB-1201	N/A
RWSD-ACB-1301	N/A

Existing standard detail	New standard detail
RWSD-ACB-1501	N/A
RWSD-COM-0501	RWFP-RF-BS-COM-0001 RWFP-RF-BS-COM-0002 RWFP-RF-BS-COM-0003 RWFP-RF-PA-COM-CAB-0009 RWFP-RF-PA-COM-NCP-0011 RWFP-RF-PA-COM-NCP-0015
RWSD-COM-0503	RWFP-RF-PA-COM-NCP-0012
RWSD-COM-0510	RWFP-RF-PA-COM-NCP-0014
RWSD-COM-1001	N/A
RWSD-COM-1510	RWFP-RF-PA-COM-CAB-0008 RWFP-RF-PA-COM-CAB-0010 RWFP-RF-PA-COM-NCP-0012
RWSD-COM-1511	RWFP-RF-PA-COM-CAB-0008
RWSD-SS-0003	N/A
RWSD-SS-0010	RWFP-SSFW-BS-DB-0119 RWFP-DSFW-BS-DB-0161
RWSD-SS-0101	N/A
RWSD-COL-0001	RWFP-DSFW-CP-DP-CPP-0451 RWFP-RW-CP-DP-CPP-0452
RWSD-COL-0002	RWFP-DSFW-PA-DB-CPP-0174

Standard details – ROCKWOOL comparison tool

Existing standard detail	New standard detail
RWSD-COL-0003	RWFP-DSFW-PA-P-CPP-0192
RWSD-COL-0004	RWFP-SSFW-PA-SB-CPP-0115
RWSD-COL-0501	RWFP-RF-CP-DP-CPP-0454
RWSD-COL-0502	RWFP-RF-CP-DP-CPP-0453
RWSD-COL-0503	N/A
RWSD-HE-0001	RWFP-SSFW-PA-SB-CAB-0108 RWFP-SSFW-PA-SB-NCP-0112 RWFP-SSFW-PA-SB-CPP-0113
RWSD-HE-0002	RWFP-SSFW-PA-SB-CPP-0113 RWFP-SSFW-PA-SB-MLC-0118
RWSD-HE-0050	RWFP-DSFW-PA-DB-CAB-0164 RWFP-DSFW-PA-DB-CPP-0170 RWFP-DSFW-PA-DB-MLC-0178
RWSD-HE-0051	RWFP-DSFW-PA-DB-CPP-0171
RWSD-HE-0052	RWFP-DSFW-PA-DB-CPP-0170 RWFP-DSFW-PA-DB-CPP-0171 RWFP-DSFW-PA-DB-MLC-0178 RWFP-DSFW-PA-DB-TRC-0179

Existing standard detail	New standard detail
RWSD-HE-0054	RWFP-DSFW-CP-DP-CPP-0406 RWFP-SSFW-PA-SB-CPP-0113 RWFP-DSFW-PA-DB-CPP-0171 RWFP-DSFW-PA-P-CPP-0189
RWSD-HE-0102	RWFP-DSFW-CP-DP-NCP-0404 RWFP-DSFW-CP-DP-CPP-0406
RWSD-HE-0103	RWFP-DSFW-CP-DP-CAB-0401 RWFP-DSFW-CP-DP-NCP-0404 RWFP-DSFW-CP-DP-CPP-0406
RWSD-HE-0110	RWFP-SSFW-CP-DP-CAB-0400
RWSD-HE-0111	RWFP-SSFW-CP-DP-CPP-0405
RWSD-HE-0501	N/A
RWSD-HE-0601	RWFP-RF-CP-DP-CPP-0410
RWSD-HE-0602	RWFP-RF-CP-DP-CAB-0408 RWFP-RF-CP-DP-CAB-0409
RWSD-IFS-0001	RWFP-DSFW-PA-DB-CPP-0175
RWSD-IFS-0002	RWFP-DSFW-PA-DB-CPP-0175
RWSD-IFS-0003	N/A
RWSD-IFS-0101	N/A
RWSD-IFS-0501	N/A

Standard details – ROCKWOOL comparison tool

Existing standard detail	New standard detail
RWSD-IFS-0601	RWFP-RF-PA-COM-CPP-0019
RWSD-IFS-1003	N/A
RWSD-PW-0001	RWFP-DSFW-PA-DB-CPP-0172
RWSD-PW-0501	RWFP-RF-PA-COM-CPP-0021
RWSD-PWR-0001	RWFP-DSFW-PA-DB-CPP-0172
RWSD-PWR-0002	RWFP-DSFW-PA-DB-CPP-0172
RWSD-PWR-0101	RWFP-DSFW-PA-P-NCP-0187
RWSD-PWR-0201	RWFP-DSFW-CP-DP-CPP-0501 RWFP-RW-CP-DP-CPP-0502
RWSD-PWR-0502	RWFP-RF-CP-DP-CPP-0503
RWSD-AIS-0001	N/A
RWSD-AIS-0101	N/A
RWSD-AIS-0110	RWFP-SSFW-CP-DP-CAB-0400
RWSD-AIS-0120	RWFP-SSFW-CP-DP-NCP-0300
RWSD-AIS-0210	RWFP-DSFW-CP-DP-CAB-0302 RWFP-RW-CP-DP-CAB-0303
RWSD-AIS-0220	RWFP-DSFW-CP-DP-CAB-0302
RWSD-AIS-0221	RWFP-DSFW-CP-DP-NCP-0301

Existing standard detail	New standard detail
RWSD-AIS-0301	RWFP-DSFW-PA-DB-NCP-0167
RWSD-EZP-0001	N/A
RWSD-EZP-0002	N/A
RWSD-EZP-0501	N/A
RWSD-LTF-0001	N/A
RWSD-SP-0001	N/A
RWSD-SP-0101	N/A
RWSD-SP-0102	N/A

Single skin flexible wall: Penetrations aperture

ROCKWOOL Fire-stopping Standard Details

Services

	Penetrations aperture		
	Single batt friction fit	Double batt friction fit	Single batt face fix
Electrical services			
Cables	RWFP-SSEW-PA-SB-CAB-0106 to 0110	RWFP-SSEW-PA-DB-CAB-0121	RWFP-SSEW-PA-P-CAB-0140 to 0142
Mechanical services			
Metal pipes	RWFP-SSEW-PA-SB-NCP-0111 to 0112	N/A	N/A
Plastic pipes	RWFP-SSEW-PA-SB-CPP-0113 to 0115	RWFP-SSEW-PA-DB-CPP-0132	RWFP-SSEW-PA-P-CPP-0144 to 0145
Multi-layer composite	RWFP-SSEW-PA-SB-MLC-0116 to 0118	N/A	N/A


To access service separation information for FirePro® CB50 standard details, please click the hyperlinked copy in the 'Penetration spacing' section of each standard detail. For example:

Or, [click here](#) to access the FirePro® CB50 Service Separation Guidance.

Penetration spacing:
[Aperture: B1-2 \(20mm\)](#)
[Similar: C1-1 \(0mm\)](#)
[Different: C1-4 \(100mm\)](#)



Figure 1: CB50 cable penetrations - single skin

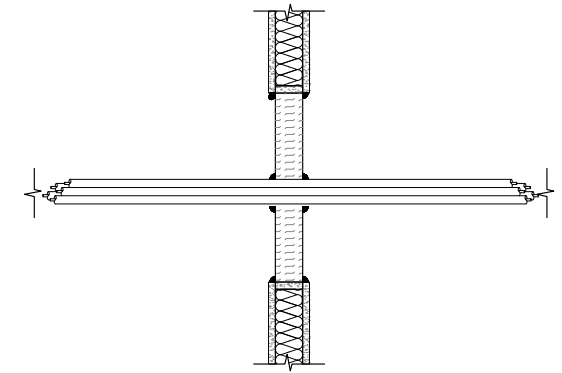

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® CB50 in single skin flexible walls:

- Cables lagged with ROCKWOOL DuctWrap
- Cables with reduced spacings < 100mm
- Cables lagged with ROCKWOOL DuctWrap with reduced spacings < 100mm
- Non-combustible pipes with combustible insulation treated with FirePro® HES
- Combustible pipes treated with FirePro® PWRoll
- MLC pipes treated with FirePro® PWRoll
- MLC pipes treated with FirePro® Pipe Collar
- MLC pipes treated with FirePro® HES
- Pattress batt deflection head
- Pattress batt with aperture seal – single sided
- Pattress batt penetration seal with cables
- Pattress batt penetration seal with combustible pipes


Single skin flexible wall: Cored penetration

ROCKWOOL Fire-stopping Standard Details

	Cored penetration			
	AIS	HES	Collar	PWRoll
Electrical services				
Cables	N/A	RWFP-SSEW-CP-DP-CAB-0400	N/A	N/A
Mechanical services				
Metal pipes	RWFP-SSEW-CP-DP-NCP-0300	RWFP-SSEW-CP-DP-NCP-0403	N/A	N/A
Plastic pipes	N/A	RWFP-SSEW-CP-DP-CPP-0405	RWFP-SSEW-CP-DP-CPP-0450	RWFP-SSEW-CP-DP-CPP-0500
Multi-layer composite	N/A	RWFP-SSEW-CP-DP-MLC-0411	RWFP-SSEW-CP-DP-MLC-0455	RWFP-SSEW-CP-DP-MLC-0504
cPVC pipes	N/A	RWFP-SSEW-CP-DP-CPP-0412	N/A	N/A

Services

Figure 1: HES combustible pipes - single skin

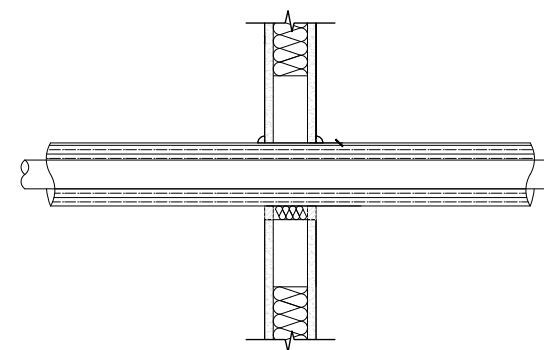

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® HES

- Non-combustible pipes with combustible insulation through single skin walls
- PVC and cPVC through single skin walls
- Cables through single skin walls
- Cables through rigid floors
- Combustible pipes through rigid floors

FirePro® AIS

- Non-combustible pipes through single skin wall
- Cables through rigid floors
- FirePro® PWRoll
- Combustible pipes through single skin walls
- MLC pipes through double skin walls

FirePro® Pipe Collar

- Combustible pipes through single skin walls
- Alternative fixing options onto double skin walls (dry wall screws)
- Combustible pipes with additional FirePro® AIS seal to the underside of rigid floors

Single skin flexible wall: Blank seal / Head of wall

ROCKWOOL Fire-stopping Standard Details

Services

	Blank seal / Head of wall		
	Single batt friction fit	Double batt friction fit	Single batt face fix
Blank seal	RWFP-SSFW-BS-SB-0100	RWFP-SSFW-BS-DB-0101	RWFP-SSFW-BS-P-0102 to 0103
Blank seal singled sided	N/A	N/A	RWFP-SSFW-BS-P-0105
Head of wall	N/A	RWFP-SSFW-BS-DB-0119	RWFP-SSFW-BS-P-0104


To access service separation information for FirePro® CB50 standard details, please click the hyperlinked copy in the 'Penetration spacing' section of each standard detail. For example:

Or, [click here](#) to access the FirePro® CB50 Service Separation Guidance.

Penetration spacing:
[Aperture: B1-2 \(20mm\)](#)
[Similar: C1-1 \(0mm\)](#)
[Different: C1-4 \(100mm\)](#)



Figure 1: CB50 blank seals - single CB50 single skin

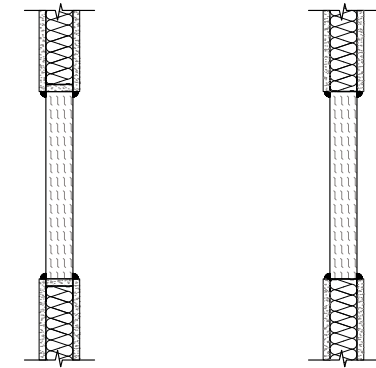

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® CB50 in single skin walls:

- Double CB50 head of wall seal, with picture frame lining and FirePro® Flex Seal deflection strip
- Pattress batt deflection head
- Pattress batt with aperture seal – single sided

Double skin flexible wall: Penetrations aperture

ROCKWOOL Fire-stopping Standard Details

Services

	Penetrations aperture		
	Single batt friction fit	Double batt friction fit	Single batt face fix
Electrical services			
Cables	RWFP-DSEW-PA-SB-CAB-0149 to 0151	RWFP-DSEW-PA-DB-CAB-0164 to 0166 RWFP-DSEW-PA-DB-CAB-0196	RWFP-DSEW-PA-P-CAB-0185 to 0186
Mechanical services			
Metal pipes	RWFP-DSEW-PA-SB-NCP-0152 to 0153	RWFP-DSEW-PA-DB-NCP-0167 to 0169	RWFP-DSEW-PA-P-NCP-0187 to 0188
Plastic pipes	RWFP-DSEW-PA-SB-CPP-0154 to 0156	RWFP-DSEW-PA-DB-CPP-0170 to 0175 RWFP-DSEW-PA-DB-CPP-0197 to 0198	RWFP-DSEW-PA-P-CPP-0189 to 0192
Multi-layer composite	RWFP-DSEW-PA-SB-MLC-0157 to 0159	RWFP-DSEW-PA-DB-MLC-0176 to 0178	RWFP-DSEW-PA-P-MLC-0193 to 0194
TracPipe	N/A	RWFP-DSEW-PA-DB-TRC-0179	N/A
Trunking	N/A	RWFP-DSEW-PA-DB-TR-0203 to 0204	RWFP-DSEW-PA-P-TR-0205 to 0206


To access service separation information for FirePro® CB50 standard details, please click the hyperlinked copy in the 'Penetration spacing' section of each standard detail. For example:

Or, [click here](#) to access the FirePro® CB50 Service Separation Guidance.

Penetration spacing:
[Aperture: B1-2 \(20mm\)](#)
[Similar: C1-1 \(0mm\)](#)
[Different: C1-4 \(100mm\)](#)



Figure 1: CB50 cable penetrations - double skin

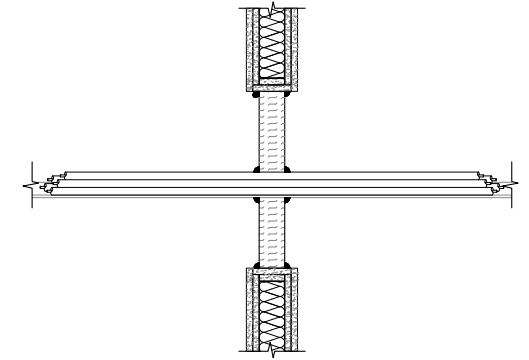

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

Single CB50 penetration seals with:

- Cables
- Non-combustible pipes with combustible insulation
- Combustible pipes
- MLC pipes

Double CB50 penetration seals with:

- Steel pipe clusters
- Non-combustible pipes with combustible insulation
- Combustible pipes
- MLC & TracPipes

Pattress penetration seals with:

- Cables
- Non-combustible pipes with combustible insulation
- Combustible pipes
- cPVC pipes
- MLC pipes


Double skin flexible wall: Cored penetration

ROCKWOOL Fire-stopping Standard Details

	Cored penetration			
	AIS	HES	Collar	PWRoll
Electrical services				
Cables	RWFP-DSEW-CP-DP-CAB-0302	RWFP-DSEW-CP-DP-CAB-0401	N/A	N/A
Mechanical services				
Metal pipes	RWFP-DSEW-CP-DP-NCP-0301	RWFP-DSEW-CP-DP-NCP-0404	N/A	N/A
Plastic pipes	N/A	RWFP-DSEW-CP-DP-CPP-0406	RWFP-DSEW-CP-DP-CPP-0451 RWFP-DSEW-CP-DP-CPP-0457	RWFP-DSEW-CP-DP-CPP-0502
Multi-layer composite	N/A	N/A	RWFP-DSEW-CP-DP-MLC-0456	RWFP-DSEW-CP-DP-MLC-0505
cPVC pipes	N/A	RWFP-DSEW-CP-DP-CPP-0413	N/A	N/A

Services

Figure 1: AIS cable penetrations - double skin

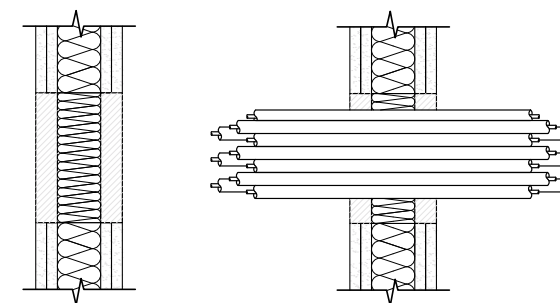

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® HES

- Non-combustible pipes with combustible insulation through double skin walls

FirePro® PWRoll

- MLC pipes through double skin walls

FirePro® Pipe Collar

- Alternative fixing options onto double skin walls (dry wall screws)

Double skin flexible wall: Blank seal / Head of wall

ROCKWOOL Fire-stopping Standard Details

Services

	Blank seal / Head of wall		
	Single batt friction fit	Double batt friction fit	Single batt face fix
Blank seal	RWFP-DSFW-BS-SB-0146	RWFP-DSFW-BS-DB-0160	RWFP-DSFW-BS-P-0180
Blank seal framed	N/A	RWFP-DSEW-BS-DB-0162	N/A
Blank seal singled sided	N/A	RWFP-DSEW-BS-DB-0195	RWFP-DSEW-BS-P-0181
Head of wall	N/A	RWFP-DSEW-BS-DB-0161	N/A


To access service separation information for FirePro® CB50 standard details, please click the hyperlinked copy in the 'Penetration spacing' section of each standard detail. For example:

Or, [click here](#) to access the FirePro® CB50 Service Separation Guidance.

Penetration spacing:
[Aperture: B1-2 \(20mm\)](#)
[Similar: C1-1 \(0mm\)](#)
[Different: C1-4 \(100mm\)](#)



Figure 1: CB50 blank seals - double skin



The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® CB50:


- Double CB50 framed and unlined
- 2600mm x 2600mm blank seal with double CB50 and FirePro® Flex Seal
- Pattress batt with aperture seal – single sided
- 2000mm x 1000mm blank seal with double CB50 – single sided

Rigid wall: Cored penetration

ROCKWOOL Fire-stopping Standard Details

	Cored penetration			
	AIS	HES	Collar	PWRoll
Electrical services				
Cables	RWFP-RW-CP-DP-CAB-0303	RWFP-RW-CP-DP-CAB-0402	N/A	N/A
Mechanical services				
Plastic pipes	N/A	RWFP-RW-CP-DP-CPP-0407	RWFP-RW-CP-DP-CPP-0452	RWFP-RW-CP-DP-CPP-0501
Multi-layer composite	N/A	N/A	N/A	RWFP-RW-CP-DP-MLC-0506
cPVC pipes	N/A	RWFP-RW-CP-DP-CPP-0414	N/A	N/A

Figure 1: Pipe Collar combustible pipe penetrations - rigid wall

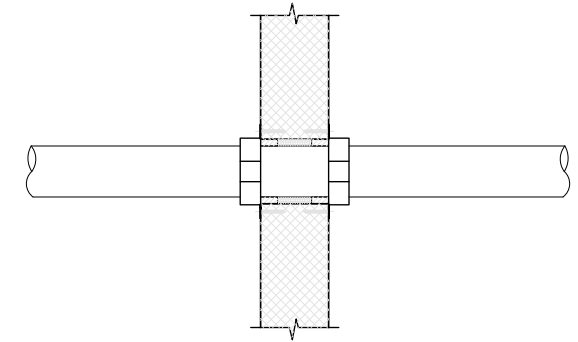

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® HES

- Combustible pipes (PP) through rigid walls

FirePro® AIS

- Cables through rigid walls


Rigid floor: Penetrations aperture

ROCKWOOL Fire-stopping Standard Details

Services

	Penetrations aperture
Electrical services	
Cables	RWFP-RF-PA-COM-CAB-0008 to 0010
Busbars	RWFP-RF-PA-COM-BUS-0018
Mechanical services	
Metal pipes	RWFP-RF-PA-COM-NCP-0011 to 0016
Plastic pipes	RWFP-RF-PA-COM-CPP-0019 to 0021
Unistrut	RWFP-RF-PA-COM-STC-0017
Service and aperture spacing plan view	Compound service separation

Figure 1: Compound busbar with Ablative Coated Batt LS lagging

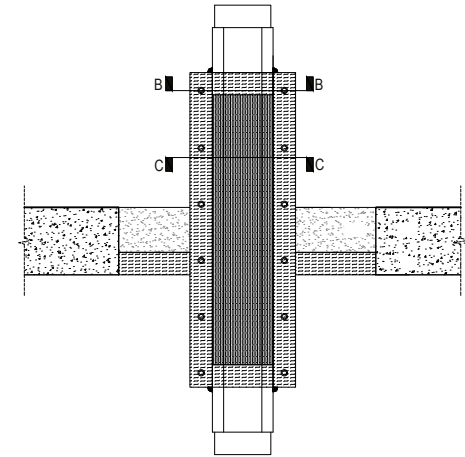

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® Compound


- Reinforced compound seals – blank seal
- Compound seals over GRP grating – blank seal
- Compound seals within hollow core slab
- Compound applied to cables as an upstand above the compound floor seal
- Cables boxed with FirePro® 50mm coated batt above a compound floor seal
- Non-combustible pipes through compound floor seals treated with RockLap H&V Pipe Sections
- Metallic services through compound floor seals which include Unistrut channels, stainless steel flues and steel busbars
- MLC pipes through compound floor seals treated with FirePro® Insulated Fire Sleeves

Rigid floor: Cored penetration

ROCKWOOL Fire-stopping Standard Details

	Cored penetration			
	AIS	HES	Collar	PWRoll
	RWFP-RF-CP-DP-CAB-0304 to 0305	RWFP-RF-CP-DP-CAB-0408 to 0409 RWFP-RF-CP-DP-CPP-0410	RWFP-RF-CP-DP-CPP-0453 to 0454	RWFP-RF-CP-DP-CPP-0503
cPVC pipes	N/A	RWFP-RF-CP-DP-CPP-0415	N/A	N/A

Figure 1: PWRoll combustible pipe penetrations - rigid floor

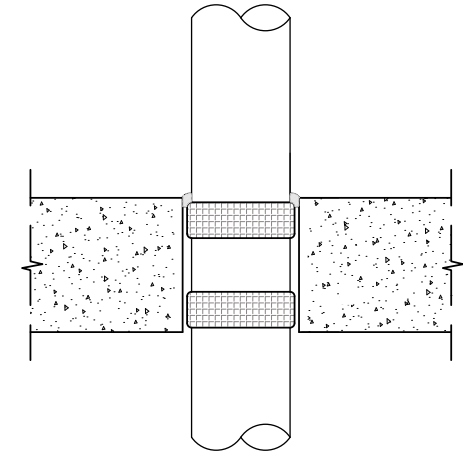

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® HES

- Non-combustible pipes with combustible insulation through single skin walls
- PVC and cPVC through single skin walls
- Cables through single skin walls
- Cables through rigid floors
- Combustible pipes through rigid floors

FirePro® AIS

- Non-combustible pipes through single skin wall
- Cables through rigid floors

FirePro® Pipe Collar

- Combustible pipes through single skin walls
- Alternative fixing options onto double skin walls (dry wall screws)
- Combustible pipes with additional FirePro® AIS seal to the underside of rigid floors


Rigid floor: Blank seal

ROCKWOOL Fire-stopping Standard Details

Services

	Blank seal
Unreinforced	RWFP-RF-BS-COM-0001
Perimeter reinforced	RWFP-RF-BS-COM-0002
Reinforced	RWFP-RF-BS-COM-0003
Over GRP grating	RWFP-RF-BS-COM-0004
Hollow core slabs	RWFP-RF-BS-COM-0005
Steel beam - AAC slab	RWFP-RF-BS-COM-0006
Aperture edge lining	RWFP-RF-BS-COM-0007

Figure 1: Compound un-reinforced seals

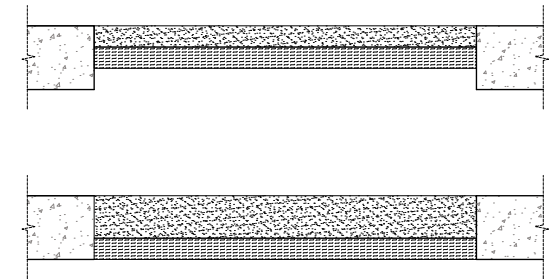

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® Compound


- Reinforced compound seals – blank seal
- Compound seals over GRP grating – blank seal
- Compound seals within hollow core slab
- Compound applied to cables as an upstand above the compound floor seal
- Cables boxed with FirePro® 50mm coated batt above a compound floor seal
- Non-combustible pipes through compound floor seals treated with RockLap H&V Pipe Sections
- Metallic services through compound floor seals which include Unistrut channels, stainless steel flues and steel busbars
- MLC pipes through compound floor seals treated with FirePro® Insulated Fire Sleeves

Linear joints

ROCKWOOL Fire-stopping Standard Details

Rigid wall	Double skin flexible wall	Rigid floor
RWFP-RW-LJ-0350	RWFP-DSFW-LJ-0353	RWFP-RF-LJ-0352
RWFP-RW-LJ-0351	RWFP-DSFW-LJ-0354	N/A

Figure 1: AIS Linear joint seals in walls - single sided & symmetrical

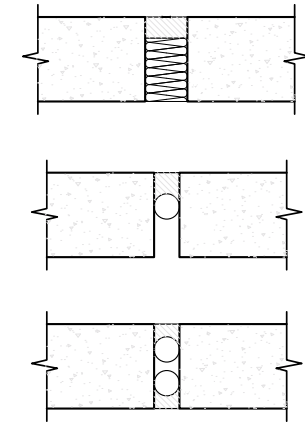

The launch of our new FirePro® range has enabled ROCKWOOL to expand its tested scope, adding the following applications using the product specified:

FirePro® AIS

- Linear joints within single skin 75mm flexible wall coverage

Index

Use this standard detail index to find the drawing reference you need from our long-list.

You can use the search function in your PDF reader to locate keywords, and find the drawing you need quickly and easily.

Page title	Substrate	Service	Main seal	Main service treatment	Drawing reference	Page
Compound un-reinforced seals	Floor	N/A	FirePro Compound	N/A	RWFP-RF-BS-COM-0001	20
Compound perimeter reinforced (AR-1)	Floor	N/A	FirePro Compound	N/A	RWFP-RF-BS-COM-0002	20
Compound reinforced (AR-2)	Floor	N/A	FirePro Compound	N/A	RWFP-RF-BS-COM-0003	20
Compound over GRP grating	Floor	N/A	FirePro Compound	N/A	RWFP-RF-BS-COM-0004	20
Compound hollow core slabs	Floor	N/A	FirePro Compound	N/A	RWFP-RF-BS-COM-0005	20
Compound steel beam – AAC slab	Floor	N/A	FirePro Compound	N/A	RWFP-RF-BS-COM-0006	20
Compound aperture edge lining	Floor	N/A	FirePro Compound	N/A	RWFP-RF-BS-COM-0007	20
Compound service separation	N/A	N/A	FirePro Compound	N/A	N/A	18
Compound cable penetrations with Compound upstand	Floor	Cables	FirePro Compound	N/A	RWFP-RF-PA-COM-CAB-0008	18
Compound cable penetrations	Floor	Cables	FirePro Compound	N/A	RWFP-RF-PA-COM-CAB-0009	18
Compound cable penetrations with Ablative Coated Batt box	Floor	Cables	FirePro Compound	FirePro® CB50	RWFP-RF-PA-COM-CAB-0010	18
Compound metallic pipe penetrations LS-CS H&V pipe lagging	Floor	Non-combustible pipes	FirePro Compound	RockLap H&V Pipe Section	RWFP-RF-PA-COM-NCP-0011	18
Compound metallic pipe penetrations LI-CI H&V top side	Floor	Non-combustible pipes	FirePro Compound	RockLap H&V Pipe Section	RWFP-RF-PA-COM-NCP-0012	18
Compound metallic pipe penetrations LI-CI H&V pipe lagging	Floor	Non-combustible pipes	FirePro Compound	RockLap H&V Pipe Section	RWFP-RF-PA-COM-NCP-0013	18
Compound sleeved pipe penetrations – H&V lagged	Floor	Non-combustible pipes	FirePro Compound	RockLap H&V Pipe Section, FirePro® AIS, RWA45	RWFP-RF-PA-COM-NCP-0014	18
Compound sleeved pipe penetrations – un-lagged	Floor	Non-combustible pipes	FirePro Compound	FirePro® AIS, RWA45	RWFP-RF-PA-COM-NCP-0015	18
Compound twin wall flue	Floor	Flue	FirePro Compound	N/A	RWFP-RF-PA-COM-NCP-0016	18
Compound steel channel (Unistrut)	Floor	Steel channel	FirePro Compound	N/A	RWFP-RF-PA-COM-STC-0017	18
Compound busbar with Ablative Coated Batt LS lagging	Floor	Busbar	FirePro Compound	FirePro® CB50, FirePro® AIS, RWA45	RWFP-RF-PA-COM-BUS-0018	18
Compound combustible pipe penetrations with Insulated Fire Sleeve	Floor	Combustible pipes	FirePro Compound	FirePro® Insulated Fire Sleeves	RWFP-RF-PA-COM-CPP-0019	18

Index

Page title	Substrate	Service	Main seal	Main service treatment	Drawing reference	Page
Compound MLC pipe penetrations with Insulated Fire Sleeve	Floor	Combustible pipes	FirePro Compound	FirePro® Insulated Fire Sleeves	RWFP-RF-PA-COM-CPP-0020	18
Compound single PWRoll in Compound	Floor	Combustible pipes	FirePro Compound	FirePro® PWRoll	RWFP-RF-PA-COM-CPP-0021	18
CB50 blank seals – single CB50 single skin	Wall	N/A	FirePro CB50	N/A	RWFP-SSFW-BS-SB-0100	13
CB50 blank seals – double CB50 – single skin	Wall	N/A	FirePro CB50	N/A	RWFP-SSFW-BS-DB-0101	13
CB50 pattress blank seals – single skin	Wall	N/A	FirePro CB50	N/A	RWFP-SSFW-BS-P-0102	13
CB50 pattress blank seals – single sided – single skin	Wall	N/A	FirePro CB50	N/A	RWFP-SSFW-BS-P-0103	13
CB50 pattress blank seals – direct to soffit – single skin	Wall	N/A	FirePro CB50	N/A	RWFP-SSFW-BS-P-0104	13
Pattress blank seals – single sided – single skin	Wall	N/A	FirePro CB50	N/A	RWFP-SSFW-BS-P-0105	13
CB50 cable penetrations – single skin	Wall	Cables	FirePro CB50	N/A	RWFP-SSFW-PA-SB-CAB-0106	11
CB50 cable penetrations treated with HES – single skin	Wall	Cables	FirePro CB50	FirePro® HES	RWFP-SSFW-PA-SB-CAB-0108	11
CB50 cable penetrations reduced spacing – single skin	Wall	Cables	FirePro CB50	N/A	RWFP-SSFW-PA-SB-CAB-0109	11
CB50 lagged cable penetrations reduced spacing – single skin	Wall	Cables	FirePro CB50	DuctWrap	RWFP-SSFW-PA-SB-CAB-0110	11
CB50 RockLap H&V lagged metallic pipes – single skin	Wall	Non-combustible pipes	FirePro CB50	RockLap H&V Pipe Section	RWFP-SSFW-PA-SB-NCP-0111	11
CB50 metallic pipes combustible insulation – single skin	Wall	Non-combustible pipes	FirePro CB50	FirePro® HES	RWFP-SSFW-PA-SB-NCP-0112	11
CB50 HES combustible pipes – single skin	Wall	Combustible pipes	FirePro CB50	FirePro® HES	RWFP-SSFW-PA-SB-CPP-0113	11
CB50 PWRoll combustible pipes – single skin	Wall	Combustible pipes	FirePro CB50	FirePro® PWRoll	RWFP-SSFW-PA-SB-CPP-0114	11
CB50 Pipe Collar to combustible pipes – single skin	Wall	Combustible pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-SSFW-PA-SB-CPP-0115	11
CB50 PWRoll to MLC pipes – single skin	Wall	MLC pipes	FirePro CB50	FirePro® PWRoll	RWFP-SSFW-PA-SB-MLC-0116	11
CB50 Pipe Collar to MLC pipes – single skin	Wall	MLC pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-SSFW-PA-SB-MLC-0117	11
CB50 HES to MLC pipes – single skin	Wall	MLC pipes	FirePro CB50	FirePro® HES	RWFP-SSFW-PA-SB-MLC-0118	11

Index

Page title	Substrate	Service	Main seal	Main service treatment	Drawing reference	Page
CB50 blank seals – double CB50 with flex seal – single skin	Wall	N/A	FirePro CB50	N/A	RWFP-SSFW-BS-DB-0119	13
CB50 cable penetrations treated with HES double CB50 – single skin	Wall	Cables	FirePro CB50	FirePro® HES	RWFP-SSFW-PA-DB-CAB-0121	11
CB50 Pipe Collar – double CB50 – single skin	Wall	Combustible pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-SSFW-PA-DB-CPP-0132	11
CB50 pattress HES – cable penetrations – single skin	Wall	Cables	FirePro CB50	FirePro® HES	RWFP-SSFW-PA-P-CAB-0140	11
CB50 pattress cable penetrations <100mm – single skin	Wall	Cables	FirePro CB50	N/A	RWFP-SSFW-PA-P-CAB-0141	11
CB50 pattress lagged cable penetrations <100mm – single skin	Wall	Cables	FirePro CB50	DuctWrap	RWFP-SSFW-PA-P-CAB-0142	11
CB50 pattress PWRoll combustible pipes – single skin	Wall	Combustible pipes	FirePro CB50	FirePro® PWRoll	RWFP-SSFW-PA-P-CPP-0144	11
CB50 Pattress Pipe Collar – single skin	Wall	Combustible pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-SSFW-PA-P-CPP-0145	11
CB50 blank seals – double skin	Wall	N/A	FirePro CB50	N/A	RWFP-DSFW-PA-SB-0146	16
CB50 cable penetrations treated with HES – double skin	Wall	Cables	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-SB-CAB-0149	14
CB50 cable penetrations reduced spacing – double skin	Wall	Cables	FirePro CB50	N/A	RWFP-DSFW-PA-SB-CAB-0150	14
CB50 lagged cable penetrations reduced spacing – double skin	Wall	Cables	FirePro CB50	DuctWrap	RWFP-DSFW-PA-SB-CAB-0151	14
CB50 RockLap H&V lagged metallic pipes – double skin	Wall	Non-combustible pipes	FirePro CB50	RockLap H&V Pipe Section	RWFP-DSFW-PA-SB-NCP-0152	14
CB50 metallic pipes combustible insulation – double skin	Wall	Non-combustible pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-SB-NCP-0153	14
CB50 HES combustible pipes – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-SB-CPP-0154	14
CB50 PWRoll combustible pipes – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® PWRoll	RWFP-DSFW-PA-SB-CPP-0155	14
CB50 Pipe Collar to combustible pipes – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-DSFW-PA-SB-CPP-0156	14
CB50 PWRoll to MLC pipes – double skin	Wall	MLC pipes	FirePro CB50	FirePro® PWRoll	RWFP-DSFW-PA-SB-MLC-0157	14
CB50 Pipe Collar to MLC pipes – double skin	Wall	MLC pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-DSFW-PA-SB-MLC-0158	14
CB50 HES insulated MLC pipes – double skin	Wall	MLC pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-SB-MLC-0159	14

Index

Page title	Substrate	Service	Main seal	Main service treatment	Drawing reference	Page
CB50 double blank seals – double skin	Wall	N/A	FirePro CB50	N/A	RWFP-DSFW-BS-DB-0160	16
CB50 double & Flex Seal blank seals – double skin	Wall	N/A	FirePro CB50	N/A	RWFP-DSFW-BS-DB-0161	16
CB50 blank seals – double CB50 – double skin	Wall	N/A	FirePro CB50	N/A	RWFP-DSFW-BS-DB-0162	16
CB50 cable penetrations HES double CB50 – double skin	Wall	Cables	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-DB-CAB-0164	14
CB50 cable penetrations reduced spacing double CB50 – double skin	Wall	Cables	FirePro CB50	N/A	RWFP-DSFW-PA-DB-CAB-0165	14
CB50 lagged cable penetrations (0mm) double CB50 – double skin	Wall	Cables	FirePro CB50	DuctWrap	RWFP-DSFW-PA-DB-CAB-0166	14
CB50 LS RockLap H&V metallic pipes double CB50 double skin	Wall	Non-combustible pipes	FirePro CB50	RockLap H&V Pipe Section	RWFP-DSFW-PA-DB-NCP-0167	14
CB50 DuctWrap metallic pipes double CB50 – double skin	Wall	Non-combustible pipes	FirePro CB50	DuctWrap	RWFP-DSFW-PA-DB-NCP-0168	14
CB50 combustible insulated metal pipes – double CB50 – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-DB-NCP-0169	14
CB50 HES combustible pipes – double CB50 – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-DB-CPP-0170	14
CB50 HES cPVC/PB. pipes – double CB50 – double skin	Wall	cPVC pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-DB-CPP-0171	14
CB50 PWRoll combustible pipes – double CB50 – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® PWRoll	RWFP-DSFW-PA-DB-CPP-0172	14
CB50 Pipe Collar – double CB50 – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-DSFW-PA-DB-CPP-0174	14
CB50 Insulated Fire Sleeve – double CB50 – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® Insulated Fire Sleeves	RWFP-DSFW-PA-DB-CPP-0175	14
CB50 PWRoll MLC pipes – double CB50 – double skin	Wall	MLC pipes	FirePro CB50	FirePro® PWRoll	RWFP-DSFW-PA-DB-MLC-0176	14
CB50 Pipe Collar MLC pipes – double CB50 – double skin	Wall	MLC pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-DSFW-PA-DB-MLC-0177	14
CB50 HES insulated MLC pipes – double CB50 – double skin	Wall	MLC pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-DB-MLC-0178	14
CB50 HES TracPipes – double CB50 – double skin	Wall	TracPipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-DB-TRC-0179	14
CB50 pattress blank seals – double skin	Wall	N/A	FirePro CB50	N/A	RWFP-DSFW-BS-P-0180	16
CB50 pattress blank seals – single sided – double skin	Wall	N/A	FirePro CB50	N/A	RWFP-DSFW-BS-P-0181	16

Index

Page title	Substrate	Service	Main seal	Main service treatment	Drawing reference	Page
CB50 pattress cable penetrations <100mm – double skin	Wall	Cables	FirePro CB50	N/A	RWFP-DSFW-PA-P-CAB-0185	14
CB50 pattress lagged cable penetrations <100mm – double skin	Wall	Cables	FirePro CB50	DuctWrap	RWFP-DSFW-PA-P-CAB-0186	14
CB50 pattress combustible lagged metallic pipes – double skin	Wall	Non-combustible pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-P-NCP-0187	14
CB50 pattress RockLap H&V lagged metallic pipes – double skin	Wall	Non-combustible pipes	FirePro CB50	RockLap H&V Pipe Section	RWFP-DSFW-PA-P-NCP-0188	14
CB50 pattress HES cPVC/PB. pipes – single skin	Wall	cPVC pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-P-CPP-0189	14
CB50 pattress HES combustible pipes – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-P-CPP-0190	14
CB50 pattress PWRoll combustible pipes – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® PWRoll	RWFP-DSFW-PA-P-CPP-0191	14
CB50 pattress Pipe Collar – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® Pipe Collar	RWFP-DSFW-PA-P-CPP-0192	14
CB50 pattress PWRoll MLC pipes – double skin	Wall	MLC pipes	FirePro CB50	FirePro® PWRoll	RWFP-DSFW-PA-P-MLC-0193	14
CB50 pattress HES insulated MLC pipes – double skin	Wall	MLC pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-P-MLC-0194	14
CB50 single sided blank seals – double skin	Wall	N/A	FirePro CB50	N/A	RWFP-DSFW-BS-DB-0195	16
CB50 single sided lagged cable penetrations double CB50 – double skin	Wall	Cables	FirePro CB50	DuctWrap	RWFP-DSFW-PA-DB-CAB-0196	14
CB50 single sided HES combustible pipes – double CB50 – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® HES	RWFP-DSFW-PA-DB-CPP-0197	14
CB50 single sided PWRoll combustible pipes – double CB50 – double skin	Wall	Combustible pipes	FirePro CB50	FirePro® PWRoll	RWFP-DSFW-PA-DB-CPP-0198	14
AIS metallic pipe penetrations RockLap H&V lagged – single skin	Wall	Non-combustible pipes	FirePro AIS	RockLap H&V Pipe Section	RWFP-SSFW-CP-DP-NCP-0300	12
AIS metallic pipe penetrations RockLap H&V lagged – double skin	Wall	Non-combustible pipes	FirePro AIS	RockLap H&V Pipe Section	RWFP-DSFW-CP-DP-NCP-0301	15
AIS cable penetrations – double skin	Wall	Cables	FirePro AIS	N/A	RWFP-DSFW-CP-DP-CAB-0302	15
AIS penetrations – rigid wall	Wall	Cables	FirePro AIS	N/A	RWFP-RW-CP-DP-CAB-0303	17
AIS cable penetrations rigid floor	Floor	Cables	FirePro AIS	N/A	RWFP-RF-CP-DP-CAB-0304	19
AIS penetrations rigid floor – DuctWrap lagging top side	Floor	Cables	FirePro AIS	DuctWrap	RWFP-RF-CP-DP-CAB-0305	19

Index

Page title	Substrate	Service	Main seal	Main service treatment	Drawing reference	Page
AIS Linear joint seals in walls – single sided & symmetrical	Wall	N/A	FirePro AIS Linear	N/A	RWFP-RW-LJ-0350	21
AIS Linear joint seals in walls – softwood & steel lining	Wall	N/A	FirePro AIS Linear	N/A	RWFP-RW-LJ-0351	21
AIS Linear joint seals in floors	Floor	N/A	FirePro AIS Linear	N/A	RWFP-RF-LJ-0352	21
AIS Linear joint seals in walls (V) – AAC to plasterboard	Wall	N/A	FirePro AIS Linear	N/A	RWFP-DSFW-LJ-0353	21
AIS Linear joint seals in walls (T) – AAC to plasterboard	Wall	N/A	FirePro AIS Linear	N/A	RWFP-DSFW-LJ-0354	21
HES cable penetrations – single skin	Wall	Cables	FirePro HES	N/A	RWFP-SSFW-CP-DP-CAB-0400	12
HES cable penetrations – double skin	Wall	Cables	FirePro HES	N/A	RWFP-DSFW-CP-DP-CAB-0401	15
HES cable penetrations – rigid wall	Wall	Cables	FirePro HES	N/A	RWFP-RW-CP-DP-CAB-0402	17
HES metallic pipes with combustible insulation – single skin	Wall	Non-combustible pipes	FirePro HES	N/A	RWFP-SSFW-CP-DP-NCP-0403	12
HES metallic pipes with combustible insulation – double skin	Wall	Non-combustible pipes	FirePro HES	N/A	RWFP-DSFW-CP-DP-NCP-0404	15
HES combustible pipes – single skin	Wall	Combustible pipes	FirePro HES	N/A	RWFP-SSFW-CP-DP-CPP-0405	12
HES combustible pipes – double skin	Wall	Combustible pipes	FirePro HES	N/A	RWFP-DSFW-CP-DP-CPP-0406	15
HES combustible pipes – rigid walls	Wall	Combustible pipes	FirePro HES	N/A	RWFP-RW-CP-DP-CPP-0407	17
HES cable penetrations rigid floor	Floor	Cables	FirePro HES	N/A	RWFP-RF-CP-DP-CAB-0408	19
HES cable penetrations rigid floor – top side lagging	Floor	Cables	FirePro HES	DuctWrap	RWFP-RF-CP-DP-CAB-0409	19
HES combustible pipe penetrations rigid floor	Floor	Combustible pipes	FirePro HES	N/A	RWFP-RF-CP-DP-CPP-0410	19
Pipe Collar combustible pipe penetrations – single skin	Wall	Combustible pipes	FirePro Pipe Collar	N/A	RWFP-SSFW-CP-DP-CPP-0450	12
Pipe Collar combustible pipe penetrations – double skin	Wall	Combustible pipes	FirePro Pipe Collar	N/A	RWFP-DSFW-CP-DP-CPP-0451	15
Pipe Collar combustible pipe penetrations – rigid wall	Wall	Combustible pipes	FirePro Pipe Collar	N/A	RWFP-RW-CP-DP-CPP-0452	17
Pipe Collar combustible pipe penetrations – rigid floor sealed top side	Floor	Combustible pipes	FirePro Pipe Collar	N/A	RWFP-RF-CP-DP-CPP-0453	19

Index

Page title	Substrate	Service	Main seal	Main service treatment	Drawing reference	Page
Pipe Collar combustible pipe penetrations – rigid floor sealed underside	Floor	Combustible pipes	FirePro Pipe Collar	N/A	RWFP-RF-CP-DP-CPP-0454	19
Pipe Collar single skin flex wall MLC	Wall	MLC pipes	FirePro Pipe Collar	N/A	RWFP-SSFW-CP-DP-MLC-0455	12
Pipe Collar double skin flex wall MLC pipes	Wall	MLC pipes	FirePro Pipe Collar	N/A	RWFP-DSFW-CP-DP-MLC-0456	15
Pipe Collar double skin flex wall dry wall fixings	Wall	Combustible pipes	FirePro Pipe Collar	N/A	RWFP-DSFW-CP-DP-CPP-0457	15
PWRoll combustible pipe penetrations – single skin	Wall	Combustible pipes	FirePro PWRoll	N/A	RWFP-SSFW-CP-DP-CPP-0500	12
PWRoll combustible pipe penetrations – rigid walls	Wall	Combustible pipes	FirePro PWRoll	N/A	RWFP-DSFW-CP-DP-CPP-0501	17
PWRoll combustible pipe penetrations – double skin	Wall	Combustible pipes	FirePro PWRoll	N/A	RWFP-DSFW-CP-DP-CPP-0502	15
PWRoll combustible pipe penetrations – rigid floor	Floor	Combustible pipes	FirePro PWRoll	N/A	RWFP-RF-CP-DP-CPP-0503	19
PWRoll multi-layer composite pipe penetrations – single skin	Wall	MLC pipes	FirePro PWRoll	N/A	RWFP-SSFW-CP-DP-MLC-0504	12
PWRoll multi-layer composite pipe penetrations – double skin	Wall	MLC pipes	FirePro PWRoll	N/A	RWFP-DSFW-CP-DP-MLC-0505	15
PWRoll combustible pipe penetrations – rigid walls	Wall	Combustible pipes	FirePro PWRoll	N/A	RWFP-RW-CP-DP-MLC-0506	17
HES multi-layer composite pipes – single skin	Wall	MLC pipes	FirePro HES	N/A	RWFP-SSFW-CP-DP-MLC-0411	12
HES cPVC pipes – single skin	Wall	cPVC pipes	FirePro HES	N/A	RWFP-SSFW-CP-DP-CPP-0412	12
HES cPVC pipes – double skin	Wall	cPVC pipes	FirePro HES	N/A	RWFP-DSFW-CP-DP-CPP-0413	15
HES cPVC pipes – rigid walls	Wall	cPVC pipes	FirePro HES	N/A	RWFP-RW-CP-DP-CPP-0414	17
HES cPVC pipe penetrations rigid floor	Floor	cPVC pipes	FirePro HES	N/A	RWFP-RF-CP-DP-CPP-0415	19
CB50 trunking penetrations double CB50 – double skin	Wall	Trunking	FirePro CB50	RWA45	RWFP-DSFW-PA-DB-TR-0203	14
CB50 lagged trunking penetrations double CB50 – double skin	Wall	Trunking	FirePro CB50	DuctWrap, RWA45	RWFP-DSFW-PA-DB-TR-0204	14
CB50 pattress trunking penetrations – double skin	Wall	Trunking	FirePro CB50	RWA45	RWFP-DSFW-PA-P-TR-0205	14
CB50 pattress lagged trunking penetrations – double skin	Wall	Trunking	FirePro CB50	DuctWrap, RWA45	RWFP-DSFW-PA-P-TR-0206	14

Legal notices

General safety requirements – Building Safety Act 2022

ROCKWOOL Limited is committed to supporting specifiers, resellers and users of ROCKWOOL products for the full life cycle of the product to comply with the obligations and responsibilities set out in the Building Safety Act 2022. With regard to the general safety requirements of the Act, ROCKWOOL Limited cannot control or foresee every situation where its products might be used. We therefore strongly advise that specifiers, resellers and users contact us where use of ROCKWOOL products is contemplated in applications different from those explicitly described in the latest, relevant ROCKWOOL product datasheets; especially in applications that can be reasonably foreseen as critical to safety.

ROCKWOOL Limited reserves the right to amend the specification of its products without notice. Changes to the ROCKWOOL manufacturing process, or to pertinent regulations, may be reflected in changes to tested and certified product performance. Whilst ROCKWOOL Limited endeavours to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law or other developments affecting the accuracy of the information contained in our publications.

ROCKWOOL Limited does not accept responsibility for the consequences of using (including testing or certifying) its products in applications different from those explicitly described in the relevant ROCKWOOL product datasheets. Expert advice should be sought, and ROCKWOOL Limited should be contacted, where such different use is contemplated, or where the extent of any use described by ROCKWOOL Limited is in doubt.

The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the most important assets of the ROCKWOOL Group, and is therefore well-protected and defended by ROCKWOOL throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion, you must apply for a Trade Mark Usage Agreement.

To apply, write to: marketcom@rockwool.com

Trademarks

Registered trademarks of the ROCKWOOL Group include but are not limited to:

ROCKWOOL®, RockClose®, RainScreen Duo Slab®, HardRock®, RockFloor® Flexi®, RockFall®, FirePro®, DuctRock®, BeamClad®, NyRock®

© ROCKWOOL 2025. All rights reserved.

Photography and illustrations

The product illustrations are the property of ROCKWOOL Limited and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement.

To apply, write to: marketcom@rockwool.com

HEALTH & SAFETY

A Material Safety Data Sheet is available and can be downloaded from www.rockwool.com/uk to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH).

Legal notices

Legal disclaimer for all information supplied

As the user, you acknowledge and agree that ROCKWOOL Limited has a very limited knowledge of the project in question and if the information you supply is not accurate then the information, calculations, product information, replies and/or specification ROCKWOOL Limited provides herein will not be accurate as a result of such inaccurate information. Whilst ROCKWOOL Limited can give general guidance and advice, the nature of ROCKWOOL Limited's products means that the ultimate responsibility for selecting the right product for a particular applications must lie with the user.

Any recommendations, calculations, drawings, specifications or other information supplied by ROCKWOOL Limited (including but not limited to design, workmanship, materials, geographic, environmental, and other specific or unique end-use conditions) are provided completely free of charge are supplied by ROCKWOOL Limited as non-binding information and entirely without acceptance of liability. It is user's responsibility to verify the adequacy and accuracy of the information received from ROCKWOOL on its suitability for the user's intended purpose. User's must obtain appropriate professional advice (for example from architects, engineers, designers/ or contractors) and if necessary, carry out trials and test installations . Before installation the suitability of the materials ultimately chosen by the user should be reviewed by Building Control or the overseeing body for the project.

Any typographical clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by ROCKWOOL Limited shall be subject to correction without any liability on the part of ROCKWOOL Limited.

Except for such liability as it may incur for death or personal injury resulting from negligence, ROCKWOOL shall not be liable in any manner whatsoever whether in contract, tort, misrepresentation or otherwise for any loss whether direct indirect or consequential nor any damage or injury howsoever caused arising from or in connection with the advice and/or information referred to in this Disclaimer. Please also refer to [Legal Notice General safety requirements – Building Safety Act 2022 \(rockwool.com\)](#) and <https://www.rockwool.com/siteassets/rw-uk/legal/building-safety-programme-remediation.pdf>

Technical fire disclaimer

ROCKWOOL Limited is a manufacturer and supplier of stone wool materials. ROCKWOOL Limited has no control over the final design, workmanship, necessary materials or applicable conditions all of which may affect the performance of the products.

Any technical support is given via installation manuals and general product descriptions only. Users should seek technical advice on their specific projects from architects, specialist engineers, designers and/or contractors.



ROCKWOOL Limited

Pencoed, Bridgend CF35 6NY

01656 862 621

info@rockwool.co.uk

www.rockwool.com/uk

Version 1.0 October 2025

